

HARVIA CILINDRO

HPCE700400M

The Harvia Cilindro Black Steel (PC 70 E & PC 90 E) heaters contain a massive amount of stones that provide soft yet strong heat. The Pillar design distributes heat evenly thanks to the large stone surface. The heaters impressive look is highlighted by stylish black steel color that provides a modern touch for your sauna.



Advantages

- Contains massive amount of stones that provides soft yet strong heat
- Stylish black steel color provides a modern touch for your sauna
- Fits into various types of sauna interiors and installations
- Heater is minimalistic and discreet when embedded in the sauna bench
- Requires a separate control unit (sold individually)

Features

Main material : Steel

H x W x D : 930.0 x 320.0 x 320.0 mm

Net weight (kg) : 7.7

Installation location : Floor

ID	GTIN	Output (kW)	Sauna room size min - max m3
HPCE700400M	6417659026055	6.8 kW	6.0-10.0

Related products


HPC1


HPC2


HPC3


HPC3L


HPC2L



Spare parts


Product	ID	Pcs
Heating element 2260W/230V Figaro	ZRH-720	3
Adjustable leg	ZSA-440	
Installation kit PC70E/PC90E	ZSC-124	
Support plate for heating elements	ZSC-140	
Support plate middle	SPZSC-140	
Heating element 2260W 230V	SPZRH-720	3
Temperature sensor (125C limiter) white	SP248	1
Adjusting leg M10x60 x 4 pcs, floor mounted heaters	SPZSA-442	1

Technical details

Technical data	Type / attribute	HPCE700400M
	Color	Black Steel
	Power output	6.8 kW
	Stone sizes	Ø5–10 cm
	Stone amount (kg)	90
Dimensions	Product width	320
	Product height	930
	Product depth (mm)	320
	Net weight (kg)	7.7
	Gross weight	9.1
	Package width	330
	Package height	975
	Package depth	330
Safety and installation dimensions	Safety distance front (non-combustible materials)	100
	Safety distance front (combustible materials)	100
	Safety distance right side (combustible materials)	100
	Safety distance right side non-combustible materials	100
	Safety distance left side (combustible materials)	100
	Safety distance left side non-combustible materials	100
	Safety distance side (non-combustible materials)	100
	safety distance to the side wall (combustible materials)	100
	Safety distance behind (non-combustible materials)	100
	Safety distance behind (combustible materials)	100
	Safety distance (Ceiling)	950
	Room min. height(depends on connections and therefore from output, star/delta)	1900
	Installation opening height	1900
	Installation opening width	520
	Installation opening depth	520




Technical images

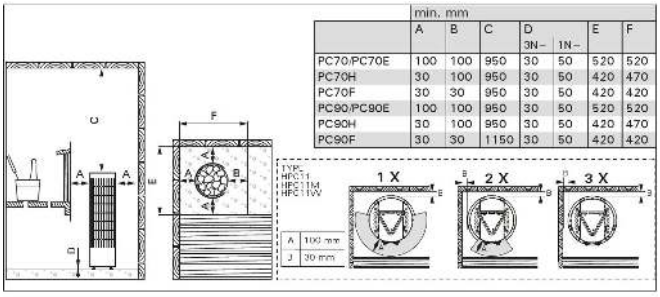


	min. mm						
	A	B	C	D 3N~	D 1N~	E	F
PC70/PC70E	100	100	950	30	50	520	520
PC70H	30	100	950	30	50	420	470
PC70F	30	30	950	30	50	420	420
PC90/PC90E	100	100	950	30	50	520	520
PC90H	30	100	950	30	50	420	470
PC90F	30	30	1150	30	50	420	420

Safety distances (all dimensions in millimeters)

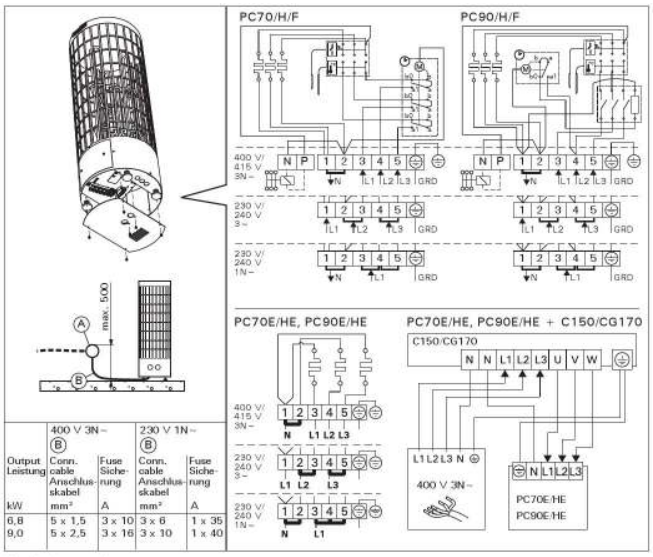

Output Leistung	400 V 3N~ Conn. cable Anschluss-kabel	400 V 3N~ Fuse Siche-rung	230 V 1N~ Conn. cable Anschluss-kabel	230 V 1N~ Fuse Siche-rung
kW	mm²	A	mm²	A
6,8	5 x 1,5	3 x 10	3 x 6	1 x 35
9,0	5 x 2,5	3 x 16	3 x 10	1 x 40

Electrical connections

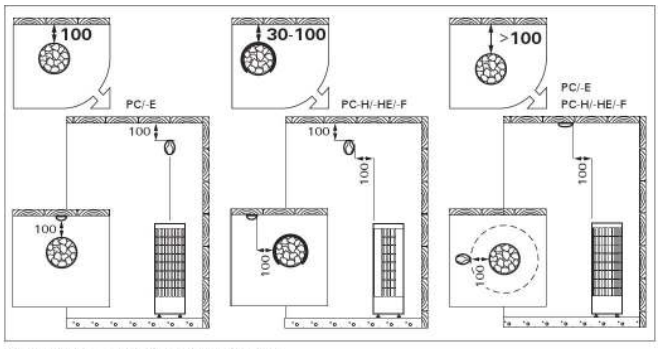

Installing the sensor (all dimensions in millimeters)