

HARVIA VIRTA PRO

HL135400SA

The Harvia Virta Pro Combi heater is a versatile combination of an electric heater and a steamer that provides Sauna & Spa experiences in large saunas, such as those of sports and wellness centres. The durable structure and easy maintenance make the heater an excellent partner for heavy duty use.



Advantages

- The Virta Pro Combi is a combined electric heater and steamer with sturdy structure for large saunas and professional use
- The large number of stones guarantees soft and abundant steam. Efficient air circulation heats the sauna very quickly
- Sleek and modern design
- The heating elements are separated from the stones, which results in a long heating element life span
- The maintenance hatch on the front enables quick and easy maintenance without touching the stones

Features

Main material : Steel

H x W x D : 810.0 x 780.0 x 410.0 mm

Net weight (kg) : 52.4

Installation location : Floor

ID	GTIN	Output (kW)	Sauna room size min - max m3
HL135400SA	6410082613571	13.2 kW	11.0-20.0

Related products


SFE-500500


HL4M


HL3


HL5



Spare parts

Product	ID	Pcs
Soapstone cup 0 46/36	ZH-205	1
Virta Combi, watertank complete, automat	ZCU-601	1
Adjustable leg	ZSA-440	
Water tank automatic complete, Virta Combi	SPZCU-601	
Soapstone cup Ø 46/36, grey	SPZH-205	
Heating element 2000W 230V	SPZH-104	2
Overheating limiter switch, Combi heaters	SPZSK-764	2
Thermostat 110 degrees Celsius Steam, white	SPZSN-250	2
Heating element 2260W 230V	SPZCU-823	6
Solenoid valve 230VAC, white	SPZSS-610	2
Water tank Virta Pro complete	SPZCU-115	2

Technical details

Technical data	Type / attribute	HL135400SA
	Color	Black
	Power output	13.2 kW
	Stone sizes	Ø10–15 cm
	Stone amount (kg)	100
Dimensions	Product width	780
	Product height	810
	Product depth (mm)	410
	Net weight (kg)	52.4
	Gross weight	56
	Package width	505
	Package height	835
	Package depth	870
Safety and installation dimensions	Safety distance front (non-combustible materials)	50
	Safety distance side (non-combustible materials)	50
	Safety distance behind (non-combustible materials)	50
	Safety distance (Ceiling)	1290
	Room min. height(depends on connections and therefore from output, star/delta)	2100



Technical images

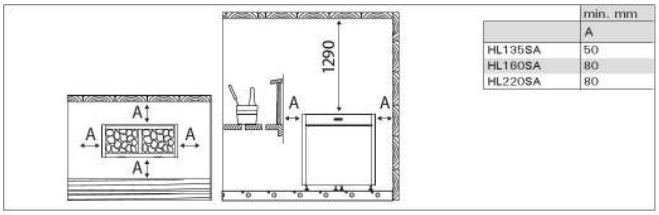

	min. mm
	A
HL135SA	50
HL160SA	80
HL220SA	80

Safety distances (all dimensions in millimeters)

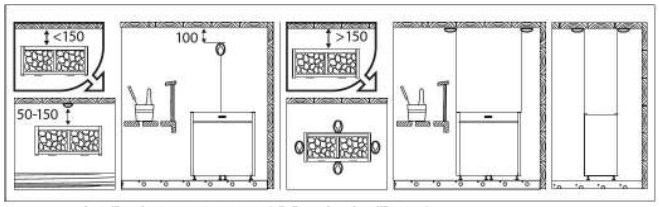

Installing the temperature sensor (all dimensions in millimeters)

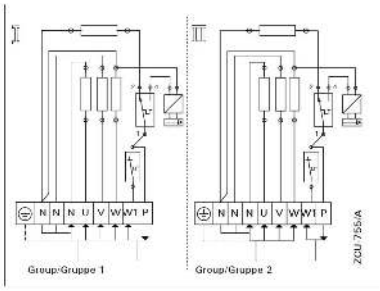

Make sure the water supply to the heater!

Stellen Sie die Wasserversorgung des Ofens sicher!

Electrical connections

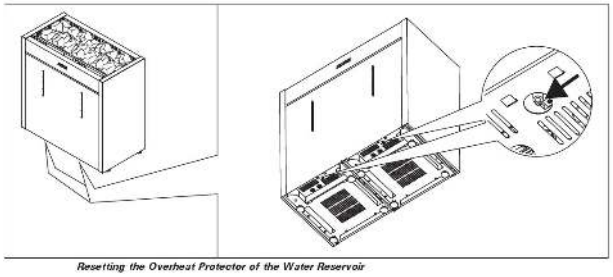

Resetting the Overheat Protector of the Water Reservoir