

HARVIA THE WALL

HSW600400M

Harvia The Wall Black Steel electric heater for medium-sized sauna rooms combines minimalistic Scandinavian design and user-friendly operation with top quality. The Wall is a compact, stylish, and reliable ensemble, that is suitable for various types of sauna interiors. The heaters stylish black steel color provides a modern touch for your sauna.



Advantages

- Compact, stylish and reliable heater for medium-sized sauna rooms
- Stylish black steel color provides a modern touch
- Easy-to-use illuminated operating switches
- Option to choose right and lefthanded installation
- Option to integrate heater in the sauna bench

Features

Main material : Steel

H x W x D : 610.0 x 430.0 x 260.0 mm

Net weight (kg) : 11.7

Installation location : Wall

ID	GTIN	Output (kW)	Sauna room size min - max m3
HSW600400M	6417659026505	6 kW	5.0-8.0

Related products


SFE-220400


HSW5


HSW5L


HSW1



Spare parts


Product	ID	Pcs
Pilot lights The Wall, red	SPZWA-061	1
Heating element support, The Wall	SPZWA-007	1
Grid, The Wall heater	SPZWA-023	1
Lead through rubber, The Wall	SPZWA-022	1
Axle short, The Wall SW45/SW60	SPZWA-041	1
Axle long, The Wall SW80-90	SPZWA-016	1
Knob timer, The Wall SW45-90	SPZWA-011	1
Knob thermostat, The Wall SW45-80	SPZWA-021	1
Heating element 2000W 230V	SPY10-0015	3
Thermostat overheating limiter switch	SPZSK-520	1
Timer + axel lock	SP641	1
Timer 4+8h	SPZSK-510	1
Timer 4h	SPZSK-510-4	1
Knob timer, The Wall SW45-90	SPZWA-011-4	1

Technical details

Technical data	Type / attribute	HSW600400M
	Color	Black Steel
	Power output	6 kW
	Stone sizes	Ø5–10 cm
	Stone amount (kg)	20
Dimensions	Product width	430
	Product height	610
	Product depth (mm)	260
	Net weight (kg)	11.7
	Gross weight	13.4
	Package width	460
	Package height	540
	Package depth	264
Safety and installation dimensions	Safety distance front (non-combustible materials)	30
	Safety distance front (combustible materials)	40
	Safety distance right side (combustible materials)	40
	Safety distance right side non-combustible materials	40
	Safety distance left side (combustible materials)	40
	Safety distance left side non-combustible materials	40
	Safety distance side (non-combustible materials)	40
	safety distance to the side wall (combustible materials)	40
	Safety distance (Ceiling)	1200
	Room min. height(depends on connections and therefore from output, star/delta)	1900
	Installation opening height	1900
	Installation opening width	340
	Installation opening depth	290



Technical images

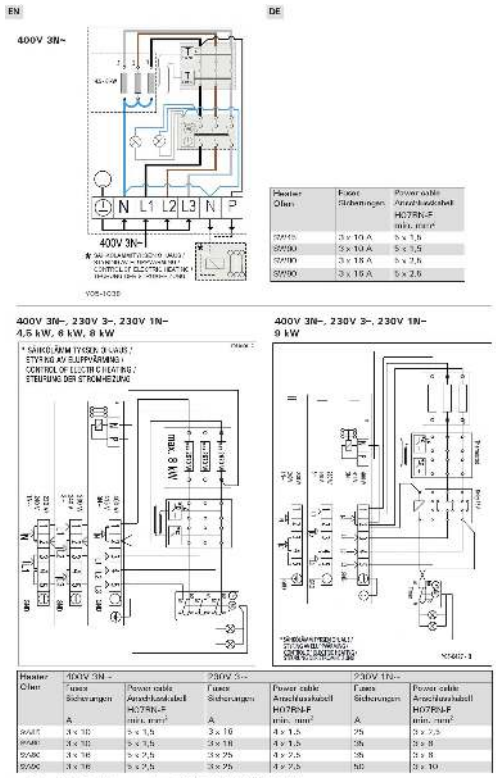

Heater Ofen	Fuses Sicherungen	Power cable Anschlusskabel H07RN-F min. mm²
SW45	3 x 10 A	5 x 1,5
SW60	3 x 10 A	5 x 1,5
SW80	3 x 16 A	5 x 2,5
SW90	3 x 16 A	5 x 2,5

Heater Ofen	400V 3N~		230V 3~		230V 1N~	
	Fuses Sicherungen A	Power cable Anschlusskabel H07RN-F min. mm²	Fuses Sicherungen A	Power cable Anschlusskabel H07RN-F min. mm²	Fuses Sicherungen A	Power cable Anschlusskabel H07RN-F min. mm²
SW45	3 x 10	5 x 1,5	3 x 16	4 x 1,5	25	3 x 2,5
SW60	3 x 10	5 x 1,5	3 x 16	4 x 1,5	35	3 x 4
SW80	3 x 16	5 x 2,5	3 x 25	4 x 2,5	35	3 x 4
SW90	3 x 16	5 x 2,5	3 x 25	4 x 2,5	50	3 x 10

Figure 11a. Electrical connections (SW45, SW60, SW80, SW90)
Abbildung 11a. Anschlussplan (SW45, SW60, SW80, SW90)